



Cordless Polisher
PV001G 180 mm (7")




40V LI-ION
max

Cord-free Polishing



No load speed by dial
600 - 2,200 min⁻¹

Continuous run time

Tested with load: 3.5-4.0kg
 Battery: BL4025 (on a full battery charge)

at 2,200min⁻¹

about **9** min

at 600min⁻¹

about **42** min






Reduction of damage to Car body

Elastomer bumpers are positioned at the portions most likely to hit car body.



Constant speed control

minimizes the reduction in pad speed to provide stable polishing.

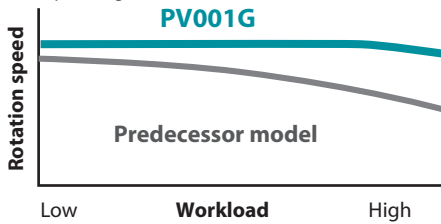

Variable speed control by dial

Max rotation speed can be selected to suit application.



Easy-to-grip head shape

enables user to easily press the pad to the car body in applications such as scratch removal with polishing compound.



3-Position loop handle



Accessories


For Wool pad hook & loop type

Wool pad 180
Part No. 192629-7

Sleeve 18
Part No. 262542-4

Backing pad

| Spindle thread | Part No. |
|----------------|----------|
| M14x2 | 743053-3 |
| M16 | 743054-1 |

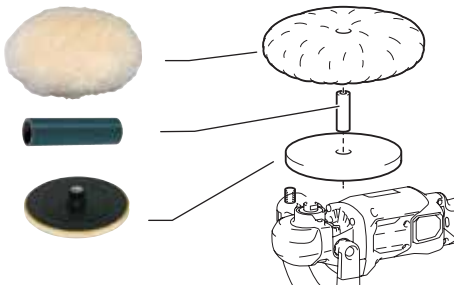


For wool bonnet

Wool bonnet 180
Part No. 794176-0

Sanding lock nut

| Spindle thread | Part No. |
|----------------|----------|
| M14-48 | 224515-5 |
| M16-48 | 224523-6 |

Rubber pad
Part No. 743012-7



Loop handle
Part No. 413F67-9



Side handle
Part No. 158237-4



Charging Time

| Battery Model | Fast Charging | |
|----------------------------|---------------|---------|
| | DC40RA | DC40RC |
| BL4020 2.0Ah 191L29-0 | 22 min | 30 min |
| *BL4025 2.5Ah 191B36-3 | 28 min | 38 min |
| *BL4040 4.0Ah 191B26-6 | 45 min | 67 min |
| *BL4050F 5.0Ah 191L47-8 | 50 min | 85 min |
| BL4080F 8.0Ah | 76 min | 170 min |

*1 Recommended battery

Cordless Polisher

PV001G 180 mm (7")

- Variable Speed
- Constant Speed
- Soft Start
- Hook & Loop

| | |
|------------------------|---|
| Brush pad capacity | 180 mm (7") |
| Pad diameter | 165 mm (6-1/2") |
| No Load Speed (RPM) | By trigger: 0 - 2,200 By dial: 600 - 2,200 |
| Vibration Level | 2.5 m/s ² or less |
| Sound Pressure Level | 80dB(A) |
| Dimensions (L x W x H) | w/ BL4020, BL4025: 516 x 196 x 195mm (20-1/4 x 7-3/4 x 7-5/8") w/ BL4040: 531 x 196 x 195mm (20-7/8 x 7-3/4 x 7-5/8") w/ BL4050F, BL4080F: 550 x 196 x 195 mm (21-5/8 x 7-3/4 x 7-5/8") |
| Net weight | 3.0 - 4.4 kg (6.6 - 9.7 lbs.) |

Standard Equipment :

Loop handle, Side grip (country-specific), Hex wrench, Wool pad (country-specific), Pad (country-specific), Wool bonnet (country-specific), Rubber pad (country-specific), Lock nut (country-specific), Lock nut wrench (country-specific), Dust cover (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET