



**Accessories**

**Adapter pipe 104-72 set**

Part No. 1910M7-9

Connection pipe which enables to use the existing accessories such as Flat nozzle or Extension nozzle



**Flat nozzle set**

Part No. 197889-6



**Extension nozzle set**

Part No. 197888-8



**Band 25 set**

Part No. 196733-4



**Portable Power Pack**

**Portable Power Pack**

**PDC1200**

Powered by 36V-40Vmax built-in battery

1,200 Wh high capacity (Approx. 6 times more capacity than BL1860B x 2)



Charger **DC4001**  
Part No. 191L01-2



**Battery Powered**

Blower **UB001C**



Grass Trimmer **UR202C**



Backpack Blower **UB002C**



Lawn mower **LM001C**



**Adapter set**

**40Vmax**

Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

**18Vx2**

Part No. 191J51-5



Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

**Charging Time**



**DC4001**  
191L01-2



**Battery Powered Backpack Blower**

**UB002C**

- Variable Speed
- Constant Speed

**Standard Equipment:**  
Adapter Pipe,  
Flat Nozzle,  
Extension Nozzle

Max Air Volume	w/ End nozzle: 0 - 19.0 m <sup>3</sup> /min w/ Flat nozzle: 0 - 17.9 m <sup>3</sup> /min
Max Air Velocity	w/ End nozzle: 0 - 71.7 m/s w/ Flat nozzle: 0 - 76.0 m/s
Blowing Force	0 - 22.0 N
No load speed (RPM)	0 - 22,000
Continuous run time on a full battery charge	78 min
Vibration level	2.5 m/s <sup>2</sup> or less
Sound pressure level	80.9 dB(A)
Sound power level	95.5 dB(A)
Dimensions (L x W x H)	w/o Nozzle: 267 x 565 x 715 mm (10-1/2 x 22-1/4 x 28-1/8") w/ Nozzle: 1,368 x 694 x 715 mm (54 x 27-1/4 x 28-1/8")
Net Weight	15.9 - 16.1 kg (35.1 - 35.4 lbs.)

**Portable Power Pack**

**PDC1200**

Capacity	33.5 Ah
Energy Capacity	1,206 Wh
Number of Cells	100
Charging Time (hours)	6
Power supply cord	Battery Side: 1.1 m (3.6 ft) Adapter Side: 0.6 m (2.0 ft)
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 39mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")
Net weight*	8.8 kg (19.4 lbs.)

\*not covered by EPTA-Procedure

**Standard Equipment:**  
Harness, Adapter for 36V (18V x2) [countries-specific], Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



**Battery Powered Backpack Blower**  
**UB002C**  
**Portable Power Pack**  
**PDC1200**



Max blowing force

**22.0N**

Max air volume

**19.0 m<sup>3</sup>/min**

With End nozzle 82

Run time

**78/45 min**

When blowing force is adjusted to 15N / 22N using Cruise control lever





Connector

# High blower performance similar to 50cm<sup>3</sup> class engine backpack blower

## 1,200Wh high capacity

Portable Power Pack

### PDC1200

**Quickly removable harness**

can be attached/removed from the main unit with a single action.

**Reflectors**

keep operator visible from a distance even in the dark.

**4-LED fuel gauge**

indicates the battery status by four green LEDs.



**Battery fuel gauge**

3-LED gauge (green)



**3-stage telescopic long nozzle**

(End nozzle 82)



Battery Powered Backpack Blower  
**UB002C**



with PDC1200

### High power

Max blowing force

**22.0 N**

Max air volume

**\*19.0 m<sup>3</sup>/min**

Max air velocity

**\*71.7 m/sec**

\*With End nozzle 82

### Low noise level

achieved by suppressing wind noise with:

- multi-blade fan with 13 blades.
- redesigned exhaust air flow path, which is equipped with sound absorbing materials.

Noise level

**81 dB(A)**



**WETGUARD IPX4 compatible**

High water-resistance allows to operate the machine even if it is wet with water.




**Reduced user's arm fatigue from long continuous operation, due to the weights of the battery and the tool body transferred from the arm to back.**



**Variable speed control by trigger plus Cruise control lever**

Cruise control lever allows user to lock the variable speed control trigger at a desired power level.

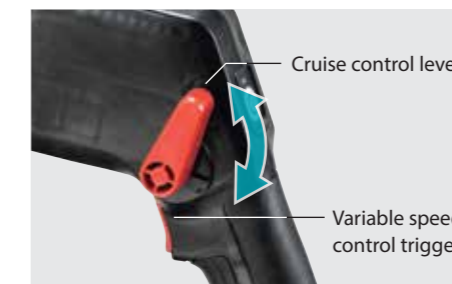

**Position adjustable grip**

The grip position is adjustable forward/backward and left/right to suit user's size or work posture.

