



Combination Hammer with Self Dust Collection System HR2652

26 mm (1"), SDS-PLUS bits



Adapted for
SDS-PLUS bits



Secure connection between dust case and dust collecting section allows for less dust leakage

Dust case
Part No. 199555-1




Transparent dust case for easy checking of
collected dust amount

Enables to accept longer drill bits

Adjustable drilling depth

Telescopic guide also functions as a
depth gauge.
A desired drilling depth can be
adjusted simply by sliding a push
button on the guide to the desired
point.

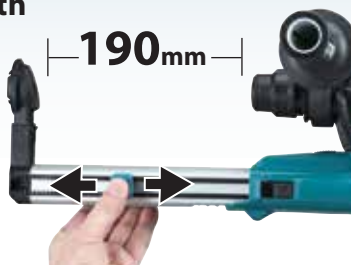

Position adjustment of Dust Collection Inlet

one action adjustment according
to bit length simply by pushing a
single push button



HEPA filter

Filter cleaning mechanism


by turning the dial, the dust falls off from the filter



Filter plate
Filter plate is engineered to prevent debris entering into motor when using without dust collection system

High dust collection performance for overhead application

Dust collection rate for overhead

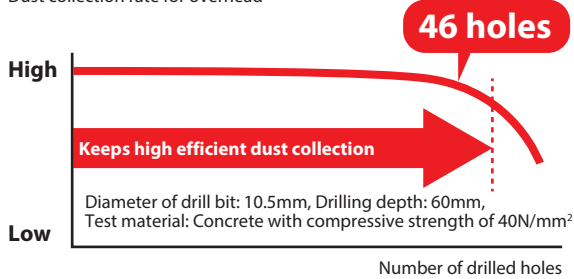

Large Fan Provides Incredibly High Dust Collection Power



65 mm

High rotation speed
20,900
min⁻¹


Detachable Dust collection system



Rotation with hammering



Hammering



Rotation (Drill Chuck is option)

Accessories

Sealing Cap

Part No. 424474-5



Depth Gauge

Part No. 324219-0



Combination Hammer with Self Dust Collection

HR2652 26 mm (1"), Adapted for SDS-PLUS bits

325

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collection

Continuous rating input	800W
Impact Energy	EPTA-Procedure 05/2009 : 2.2 J
Capacity	Our experimental conditions: 2.9 J Concrete : 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel : 13 mm (1/2") Wood : 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete : 12.5 m/s ² Chiselling Function w/ Side Grip: 9.5 m/s ² Drilling Into Metal : 2.5 m/s ²
Dimensions (L x W x H)	604 x 89 x 260 mm (23-3/4"x3-1/2"x10-1/4")
Net weight	3 - 4.3 kg (6.7 - 9.4 lbs.)
Power supply cord	2.5 m (8.2 ft.)

Standard Equipment :
Side Grip, Depth Gauge, Sealing Cap

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE